


# CORD-LESS Teth-Air

The factory tether plug is also an OEM design but accepts 2 standard male blade connectors. When using standard blade connectors, ensure that they are insulated or uses shrink tubing over the connection to avoid grounding or shorting.



Cut the antenna tip to 2 cm's and place on the protective yellow cap.  
Run the antenna wire up to the handlebar and secure with the provided wire-ties next to the Throttle flipper, but do not obstruct the flippers movement.

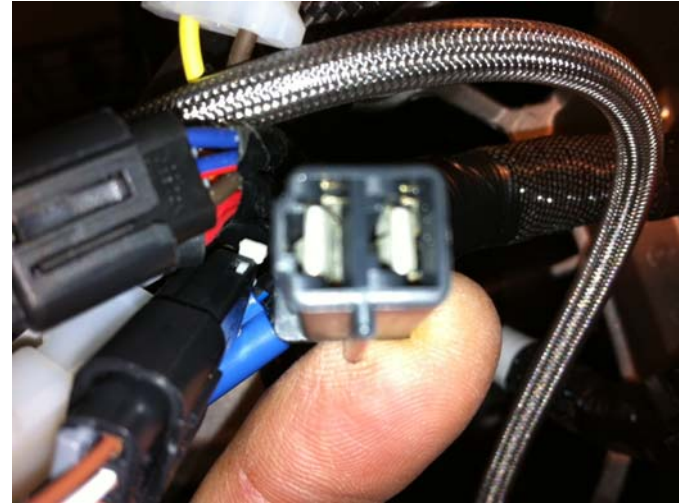

The Green and Brown Teth-Air wires Plug into this black plug. The gray wire is Not used and can be taped off or cut off.

